

IPC-710

4U Standard Rack-mounted Chassis

IPC-710 is a new 4U rack-mounted chassis launched by EVOC, and the only difference between it and the IPC classic series of IPC-810E is that the front panel is different; With the same identity, quality, production process, and internal structure as IPC-810E, the product with a new shape can be compatible with various full-series full-length cards and industrial motherboards such as EPI, EPE, EC7, EC9, EC0 and ECS of the company. As a classic 4U rack-mounted chassis, the product can be widely used in intelligent manufacturing, industrial automation, petroleum and petrochemicals, finance, electricity, transportation and other fields.



Product Features



4U standard rack-mounted




Excellent heat dissipation



Excellent EMC performance

Product Dimensions Drawing

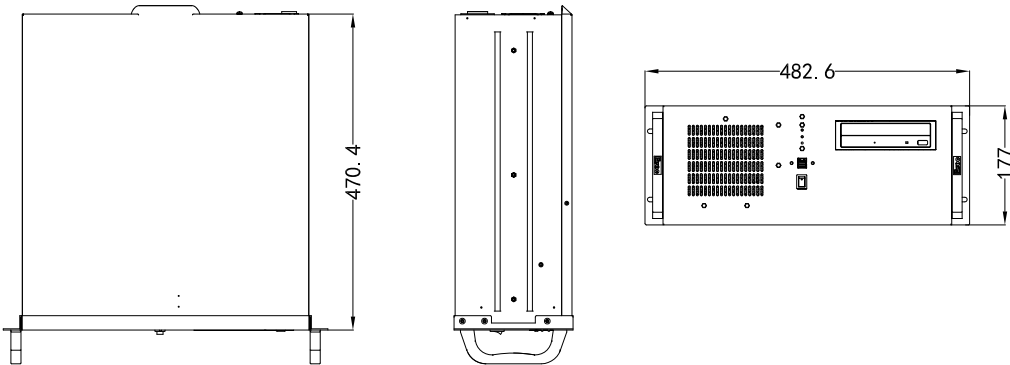

(Please refer to the user manual to check detailed specifications and dimensions) (unit: MM)

Product Specifications

Item	Description
Motherboard	ATX motherboard
Storage	1 x 5.25" CD-ROM space 2 x 3.5" HDD space (with shock absorption) 1 x 3.5" HDD space (without shock absorption)
I/O Port	Power switch, reset switch, power supply and hard disk indicator; 2 x USB port in front
Power Supply	Standard ATX power supply
Working Temperature	0°C~50°C, 5%~90% (non-condensing state)
Storage Temperature	-20°C~60°C, 5%~90% (non-condensing state)
Overall Dimensions (W×H×D)	482.6mm×177mm×470.4mm

Ordering Information

Part No.	Model	Description
0020-062061	IPC-710/EC9-1501-ZX/C4580/250W	ZX C4580 motherboard/250W power supply/2 x COM, 6 x USB (2 front and 4 rear), 2 x Gigabit LAN port, VGA+DVI-D, 1 group of audio ports, 1 x PS2; expansion: 2 x PCI, 1 x PCIEX4, 1 x PCIEX16 (actual rate X8)
0020-062081	IPC-710/EC0-1816V2NA	H61 platform motherboard/250W power supply/2 x COM, 6 x USB (2 front and 4 rear), 2 x Gigabit LAN port, VGA+DVI-D, 1 group of audio ports, 1 x PS2; expansion: 5 x PCI, 1 x PCIEX4 (actual rate X1), 1 x PCIEX16
0020-064121	IPC-710/ECO-1816-6COM/250W	H61 platform motherboard/250W power supply/2 x COM, 6 x USB (2 front and 4 rear), 2 x Gigabit LAN port, VGA+DV-D, 1 group of audio ports, 1 x PS2; expansion: 4 x PCI, 1 x PCIEX4 and 1 x PCIEX16
0020-062091	IPC-710/EC0-1817V2NA	H81 platform motherboard/250W power supply/2 x COM, 6 x USB port (2 front and 4 rear), 2 x Gigabit LAN port, VGA+DVI-D, 1 group of audio ports, 1 x PS2; expansion: 4 x PCI, 2 x PCIEX4 (actual rate X1), 1 x PCIEX16
0020-065761	IPC-710/EC0-1818/250W	H110 platform motherboard/250W power supply/2 x COM, 6 x USB (2 front and 4 rear), 2 x Gigabit LAN port, VGA+HDMI, 1 group of audio ports, 1 x PS2; expansion: 4 x PCI, 1 x PCIEX4 and 1 x PCIEX16
0020-066751	IPC-710/EC0-1818-C236/250W	C236 platform motherboard/250W power supply/2 x COM, 6 x USB (2 front and 4 rear), 2 x Gigabit LAN port, supporting any three displays (VGA, HDMI, DVID, DP), 1 group of audio ports, 1 x PS2; expansion: 2 x PCI, 3 x PCIEX4 (X8 connector), 2 x PCIEX16 Note: If two PCIEX16 slots are used at the same time, the speed will be reduced to PCIEX8
0020-066421	IPC-710/EC0-1820/250W	H310 platform motherboard/250W power supply/2 x COM, 6 x USB (2 front and 4 rear), 2 x Gigabit LAN port, any two-out-of-four display (VGA, HDMI, DVID, DP), 1 group of audio ports, expansion: 5 x PCI, 1 x PCIEX4, 1 x PCIEX16
0020-066411	IPC-710/EC0-1822/350W	H420E platform motherboard/350W power supply/2 x COM, 8 x USB (2 front and 6 rear), 2 x Gigabit LAN port, VGA+DP, 1 group of audio ports, expansion: 4 x PCI, 2 x PCIEX4 (actual rate X1), 1 x PCIEX16
0020-067491	IPC-710/EC0-1826/300W	Q670E platform motherboard/300W power supply/1 x COM, 10 x USB, 2 x Gigabit LAN port, VGA+DP+HDMI2.0 three-display, 1 group of audio ports/1 x PCI, 1 x PCIe3.0 x4, 3 x PCIe4.0 x4, 1 x PCIe4.0 x16, 1 x PCIe4.0 x16 (x8 link) Note: If two PCIe x16 slots are used at the same time, the speed will be reduced to PCIe x8

Note: EVOC Intelligent reserves the right to final interpretation of product specifications and ordering information etc.