

W21B

21.5" Wide-screen Industrial Panel PC

W21 is a 21.5" wide-screen industrial panel PC. The front panel supports IP65 protection grade, and the interior adopts fanless modular design to support various CPU modules. I/O ports and touch screen types can be flexibly changed according to different application scenarios.

W21 series products are mainly used in rail transit, machine vision, industrial automation and other fields, such as shield tunnel boring machines, automatic production line MES, integrated monitoring (rail transit, building, power, etc.), CNC machine tools, monocrystalline furnace, auto parts control and other application scenarios, to meet the diversified production and application needs of customers.



Product Features



Resistive/
capacitive touch
screen optional



Protection
grade: IP65



Multiple
installation
methods



Supports
quick
customization
of I/O port




Fully sealed
and fanless



Industrial-
grade touch
screen

Product Dimensions Drawing

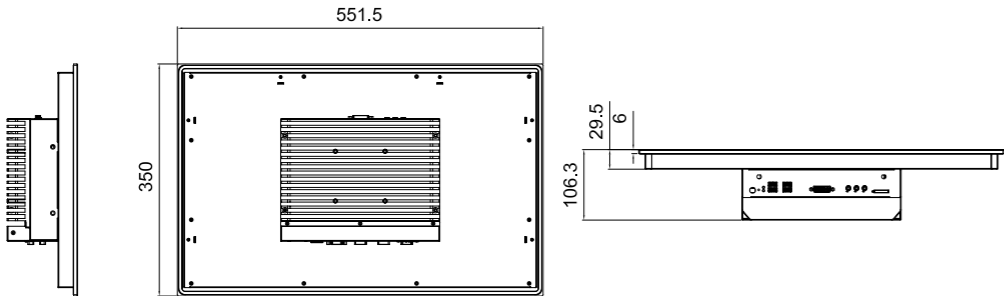

(Please refer to the user manual to check detailed specifications and dimensions) (unit: MM)

Product Specifications

Item		Description
Display Performance	Screen Size	21.5" TFT LCD 16:9 wide-screen
	Maximum Resolution	1920×1080
	Brightness	≥250cd/m2 (bare screen)
	Contrast Ratio	1000:1
Touch Screen		Capacitive screen, full plane, 10-point touch control; Resistive screen, 5-wire resistive screen, single touch;
System Configuration	Processor	Intel Celeron: onboard J1900/J6412/X6425E and other processors; SkyLake-U: Onboard Intel® I3-6100U/i5-6300U/i7-6600U processor; H110/C236: supports 6/7/8th Gen Intel® Core™ i3/i5/i7 series, 9th Gen Intel® Core™ i3/i5 series, LGA1151, CPU TDP ≤ 65W; H310/Q370: supports 8/9th Gen Intel® Core™ i3/i5/i7 series, Celeron, Pentium series processors, LGA1151, CPU TDP ≤ 65W; H610E/Q670E: supports 12/13th Gen Core™ i9/i7/i5/i3/ Pentium® Gold/ Celeron® G series processor LGA1700 pin, and processors with a power consumption lower than 65W;
	Memory	BayTrail: supports 1x 204Pin DDR3L SO-DIMM slot, up to 8GB SkyLake-U: supports 1x 260Pin DDR4 SO-DIMM memory slot, onboard 4GB, with the slot supporting up to 16GB and the complete PC up to 20GB; H110/C236/H310/Q370: supports 2x 260Pin DDR4 SO-DIMM memory slots, with 1 slot supporting up to 32GB and the complete PC up to 64GB; H610E/Q670E: supports two DDR5 4800MHz SO-DIMM memory slots, with 1 slot supporting up to 32G and the complete PC up to 64GB;
I/O Port	LAN Port	H110/C236/H310/Q370: 2/4/6 RJ45 10/100/1000Mbps LAN port (optional) H610E/Q670E: Standard configuration of 1x RJ45 gigabit electrical port and 1x 2.5G electrical port; H610E can be equipped with two more 2.5G electrical ports, and Q670E can be equipped with four more 2.5G LAN ports
	Display Port	BayTrail/SkyLake-U: supports VGA and HDMI display ports; H110/C236/H310/Q370: supports VGA, HDMI and DVI display ports; H610E/Q670E: supports 2x HDMI 2.0, 1x DP1.4, and simultaneous three display
	USB	BayTrail: supports up to 1x USB3.0 + 5x USB2.0; SkyLake-U: 2x USB3.0 + 2 x USB2.0 port; H110: 4x USB3.0+4 xUSB2.0 port; C236: 8x USB3.0; H310/Q370: 4x USB3.0+4 x USB2.0 port; H610E: 2x USB3.2 Gen2, 1x USB3.2 Gen1 port and 5x USB2.0 port; Q670E: 4x USB3.2 Gen2, and 4 x USB3.2 Gen1 port;
	COM	2~6 x serial port (depending on the specific platform and configuration)
	Audio	BayTrail/SkyLake-U: 1 group of Audio ports (supporting MIC-IN and LINE-OUT); H110/C236/H310/Q370: 1 group of Audio ports (supporting MIC-IN, LINE-OUT and LINE-IN); H610E/Q670E: 1 group of Audio ports (supporting MIC-IN and LINE-OUT)
	Bus Expansion Slot	Expansion slots depend on the specific configuration
Storage	Hard Disk	BayTrail/SkyLake-U: 1x SATA interface; H110/C236/H310/Q370/H610E/Q670E: 2x SATA interface;
	M-SATA/M.2	BayTrail/SkyLake-U: 1x M-SATA slot; H110/C236: 1x M-SATA slot, 1x M.2 keyM slot; H310: 1x M.2 keyB slot; Q370/H610E/Q670E: 1x M.2 keyM slot;
Working Environment		CPU TDP < 35W, Working Temperature: 0°C~45°C with HDD; Working Temperature: 0°C~50°C with SSD; 35W≤CPU TDP≤65W, Working Temperature: 0°C~40°C with HDD; Working Temperature: 0°C~50°C with SSD;
Storage Environment		-20°C~+60°C; Humidity: 5%-95% (non-condensing state)
Product Dimensions		552mm (W) x 350mm (H) (depth dimension depends on the specific configuration)
Mounting Hole Dimensions		535mm (W) x328mm(H)
IP Grade		The aluminum alloy front panel meets the protection grade of IP65
Installation Method		Supports embedded, VESA standard mount, etc.
Power Supply		BayTrail: 1x 2Pin Phoenix terminal type power interface, and 1x 2Pin Phoenix terminal type remote switch port. The input voltage depends on the specific configuration SkyLake-U/H110/C236/H310/Q370/H610E/Q670E: 1x 4Pin Phoenix terminal type power port, input voltage as per specific configuration

Ordering Information

Part No.	Model	Description
0020-068291	W21BC-50	21.5" wide-screen fanless panel barebone system/Intel Celeron chipset/Celeron J6412 2.0Ghz quad-core processor/no memory/no hard disk/serial port*4/USB2.0*3+USB3.0*1/gigabit LAN port*2/VGA*1/HDMI*1/Line-out*1/MIC*1/12V DC power supply/no adapter/aluminum alloy front panel/capacitive touch screen
0010-284811	W21BC-52	21.5" wide-screen fanless panel PC/Intel®Skylake SOC chipset/i5-6300U 2.4Ghz dual-core processor/8GB memory/256G SSD/serial port*4/USB2.0*2+USB3.0*2/gigabit LAN port*2/VGA*1/HDMI*1/Line-out*1/MIC*1/19V DC power supply/19V power adapter*1/aluminum alloy front panel/capacitive touch screen

Note: EVOC Intelligent reserves the right to final interpretation of product specifications and ordering information etc.